## MEASUREMENT WORKSHEET: Ground-to-Dock Ramp Application





## The Yard Ramp Guy® 888-977-4224


Email form and photos to: Photos@YardRampGuy.com

Address	Contact First & Last Name		
City		State	Zip

Inches:





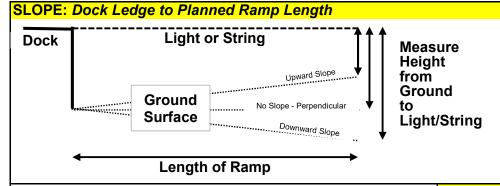


## Using Laser Light . . .


- 1. Place laser light on ledge of dock.
- 2. Walk out same # feet as planned ramp length.
- 3. Face laser to catch beam of light on body.
- 4. Measure from the ground up to the point of light on paper.


## Using String . . .

- 1. Pin or tape string to ledge of dock.
- 2. Walk out same # feet as planned ramp length.
- 3. Pull string tight & level with dock height.
- 4. Hold/press string against your body.
- 5. Measure from the ground up to where string touches body.







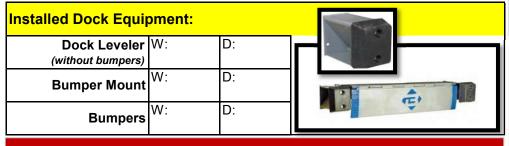

Completed form <u>AND</u> all photos similar to those shown with captions are required prior to production or delivery of ground-to-dock ramp.

