



# The Yard Ramp Guy®

205 Winding Oak Lane  
Buffalo Grove, IL 60089

888-977-4224  
Main Line & Fax Line

[www.YardRampGuy.com](http://www.YardRampGuy.com)

## WORKSHEET:

### Measuring Slope for Ground-to-Dock Ramp Application


Company: \_\_\_\_\_

Zip: \_\_\_\_\_

Contact: \_\_\_\_\_


Phone: \_\_\_\_\_

Email: \_\_\_\_\_

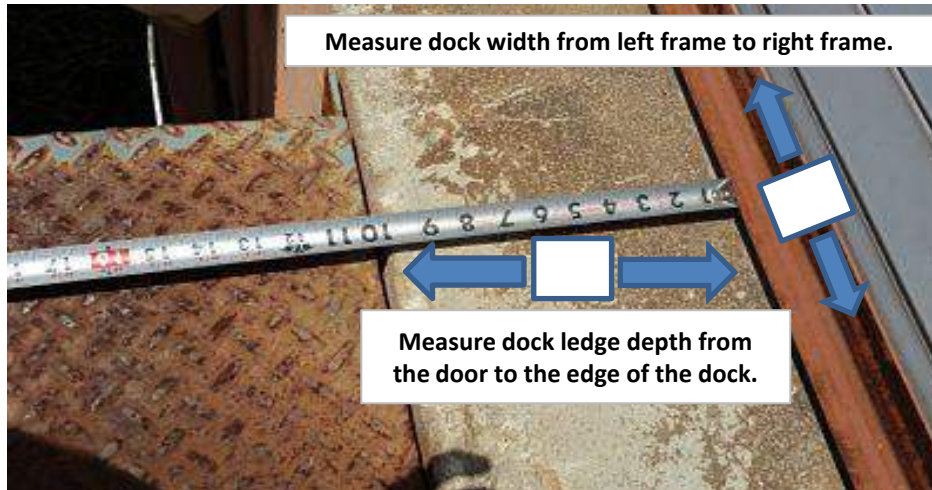

Measure the slope from the dock at 20' out, 25' out, and 30' out. Take measurements from the far left and far right of the dock.

1. Place laser light on ledge of dock (far right side or far left side).
2. Stand holding white sheet of paper at one of the six markers.
3. Line up paper with beam of light.
4. Measure from the ground up to the point of light on paper.
5. Fill in number of inches appropriate box below.

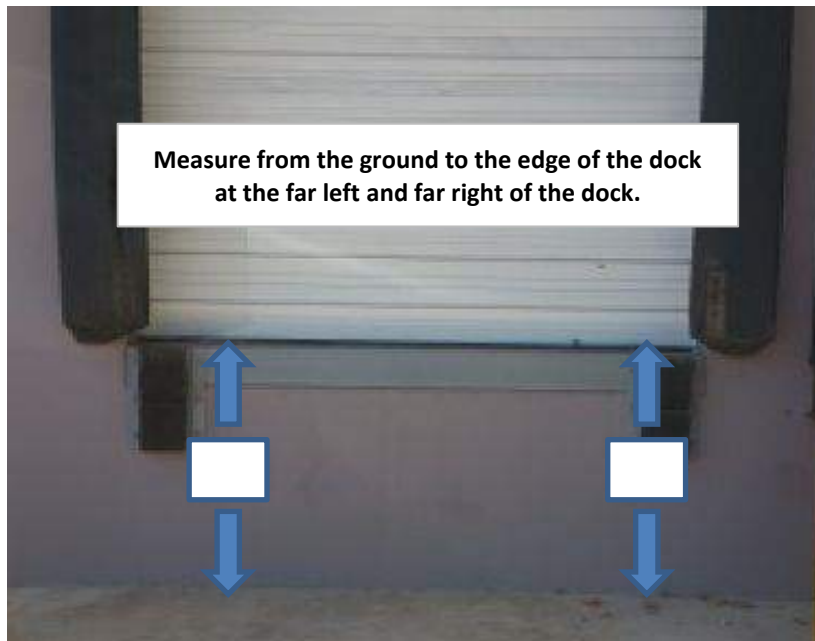

Please write-in number of inches to each box.

